

MAGNIFICA®

THE THIRTIES

by Bedrosians® Tile & Stone



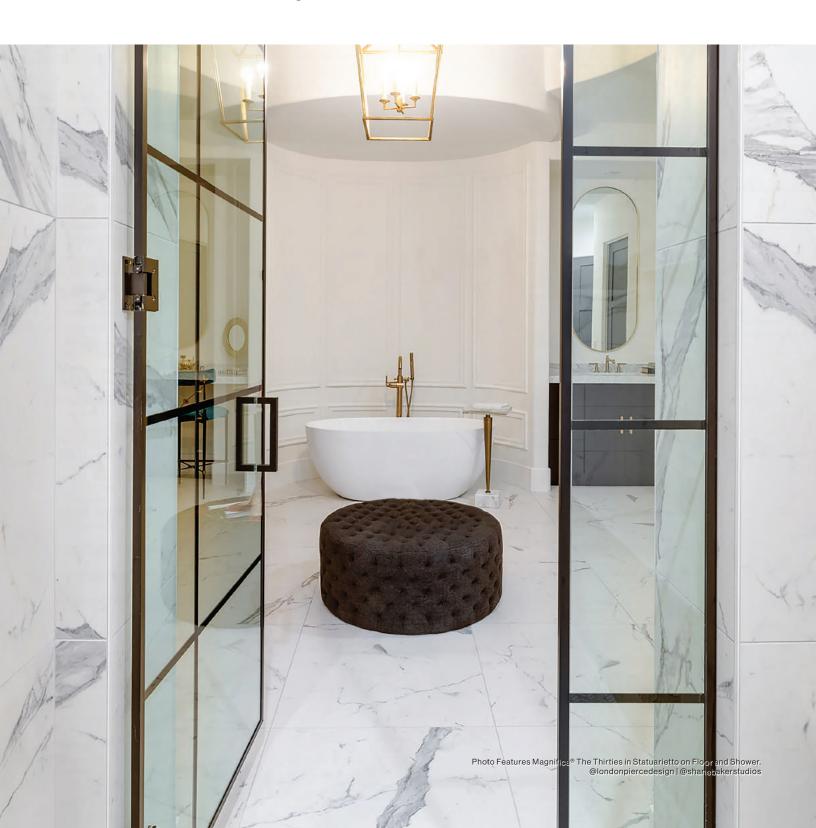



DOLMAGPUW3030-8H-30"x30" 8mm Honed DOLMAGPUW3030-8P-30"x30" 8mm Polished



BIANCO CARRARA

DOLMAGCAR3030-8H-30"x30" 8mm Honed DOLMAGCAR3030-8P-30"x30" 8mm Polished



STATUARIETTO

DOLMAGETT3030-8H - 30"x30" 8mm Honed DOLMAGETT3030-8P - 30"x30" 8mm Polished



LUXE WHITE

DOLMAGLUX3030-8H-30"x30" 8mm Honed DOLMAGLUX3030-8P-30"x30" 8mm Polished



CALACATTA ORO

DOLMAGORO3030-8H-30"x30"8mmHoned DOLMAGORO3030-8P-30"x30" 8mm Polished



CALACATTA SUPER WHITE

DOLMAGCAL3030-8H-30"x30"8mmHoned DOLMAGCAL3030-8P-30"x30" 8mm Polished




TAJ MAHAL

DOLMAGTAJ3030-8H - 30"x30" 8mm Honed DOLMAGTAJ3030-8P - 30"x30" 8mm Polished



CEMENTI

DOLMAGCEM3030-8H-30"x30"8mmHoned




PIETRA GREY

DOLMAGPIE3030-8H-30"x30"8mm Honed DOLMAGPIE3030-8P-30"x30"8mm Polished



BASALTO
DOLMAGBAS3030-8H-30"x30"8mmHoned




PURE BLACK
DOLMAGPUB3030-8H-30"x30"8mm Honed
DOLMAGPUB3030-8P-30"x30"8mm Polished



NERO MARQUINA

DOLMAGNER3030-8H-30"x30"8mm Honed
DOLMAGNER3030-8P-30"x30"8mm Polished

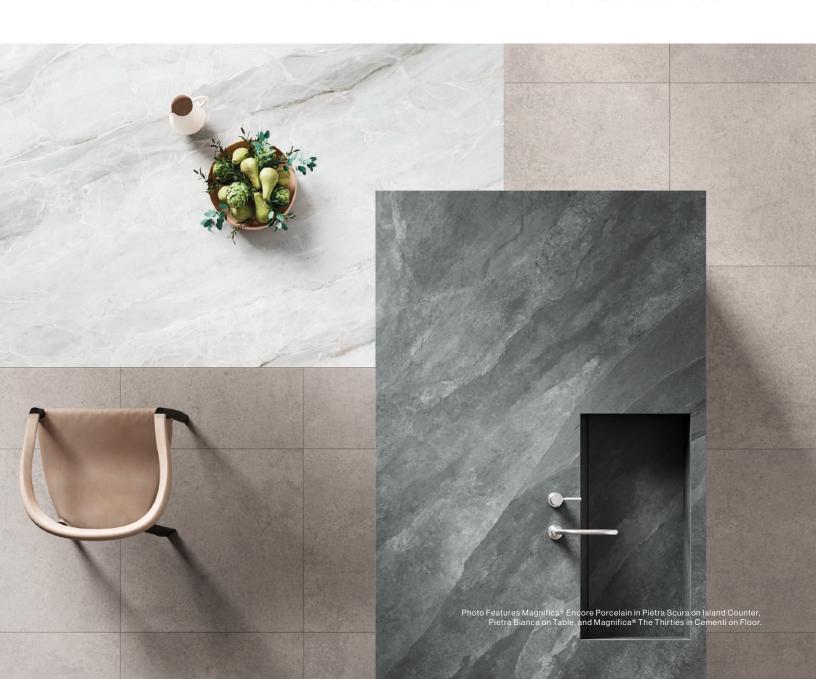




SIZING & PACKAGING

Туре	Shape	Item Code	Size	Description	Pcs / Ctn	Sf / Ctn
Field		DOLMAG···3030-8H	30"x30"	8mm Field Tile - Honed	3	18.16
	Ø	DOLMAG•••3030-8P	30"x30"	8mm Field Tile - Polished	3	18.16

ANSI TECHNICAL SPECIFICATIONS

	DCOF Acutest	PEI Rating ASTM# C1027	Frost Resistant ASTM# C1026	Scratch Resistance MOHS	Breaking Strength ASTM# C648	Water Absorption ASTM# C373	Chemical Resistance ASTM# C650
Results	≥ 0.42 (Honed Only)	Pass≤175 (ISO)	Unaffected	7	≥250 lbf	≤0.5%	Unaffected



APPLICATIONS

	Floors	Walls	Countertops	Shower Floors	Shower Walls	Pools/Spas
Residential	•	•	•	Honed	•	Honed
Commercial	Honed	•	•	Honed	•	Honed



LEGEND

- Product rated for Interior & Exterior use
- Product rated for Interior use only
- † May be suitable for Exterior Floors

- Applications & ANSI Technical Specifications do not apply
- * Special Order only
- T may be darkable for Extended from













PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS: UL.COM/GG UL 2818



Use of a leveling system during installation is strongly recommended

Bedrosians® offers to its immediate and direct customer a nontransferable 10 Year Limited Warranty on all Magnifica® Encore 12mm and 2cm 60" x 126" or 60" x127" porcelain panels sold on or after April 1, 2018. No registration is required, however, customer must provide proof of purchase via an original invoice. Please reference the Magnifica® Limited Warranty online for detailed information.

For warranty to apply, the Magnifica® Encore installer must complete an ANSI A108.19 specified qualification program prior to fabricating and installing the panels and the panels must be installed in accordance with TCNA guidelines, ANSI 108.19, and all of the manufacturer's written instructions.

For installation of all polished, satin, or honed porcelain, use a grout release prior to grouting to prevent absorption of the grout into the tile's micropores. We recommend use of a grout color that matches the predominant color of the tile. Tiles with a polished finish are not appropriate for wet orexteriorfloor applications. Do not use acidic cleaners.

Merchandising materials and samples are for general reference only and representative of a product's potential characteristics. Tile is subject to variation in color/shade, size, texture, and finish. Field, mosaic and trim tile may not match exactly. Blend tiles from different boxes to achieve consistent shade distribution. Installer and end user must conduct a dry mock layout under proper lighting conditions to inspect the product. Installation constitutes product acceptance. Improper installation, application, use, care and maintenance voids warranty. Reference the TCNA Handbook and ANSI for installation guidance. Please visit bedrosians.com for current product information. We reserve the right to make product changes at any time without notice.

