



Field Tile Sizes



Shenandoah - SHE
DOLMETSHE1224 - 12"x24" Rectified Field Tile - Matte
DOLMETSHE2424 - 24"x24" Rectified Field Tile - Matte

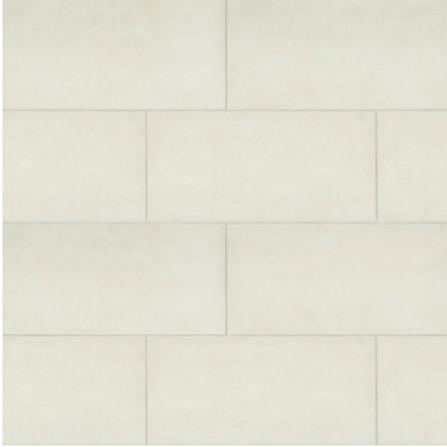

Long Island - LON
DOLMETLON1224 - 12"x24" Rectified Field Tile - Matte
DOLMETLON2424 - 24"x24" Rectified Field Tile - Matte

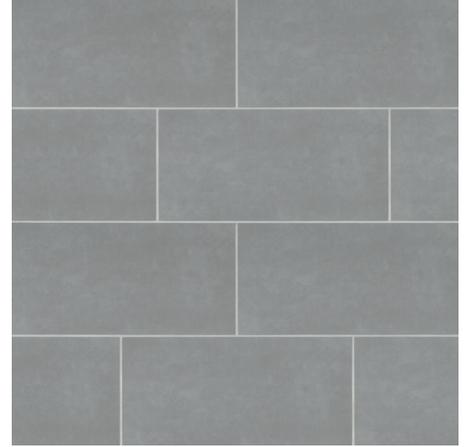


Cloudysky - CLO
DOLMETCLO1224 - 12"x24" Rectified Field Tile - Matte
DOLMETCLO2424 - 24"x24" Rectified Field Tile - Matte



Greensky - GRE
DOLMETGRE1224 - 12"x24" Rectified Field Tile - Matte
DOLMETGRE2424 - 24"x24" Rectified Field Tile - Matte



Nightsky - NIG
DOLMETNIG1224 - 12"x24" Rectified Field Tile - Matte
DOLMETNIG2424 - 24"x24" Rectified Field Tile - Matte

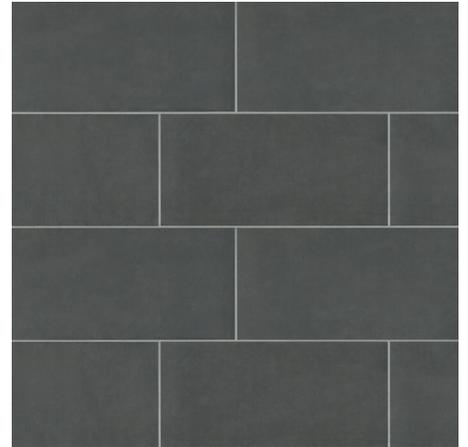


Acadia - ACA
DOLMETACA1224 - 12"x24" Rectified Field Tile - Matte
DOLMETACA2424 - 24"x24" Rectified Field Tile - Matte


2"x2" Mosaic - Matte (12"x12" Sheet)




Shenandoah - SHE
DOLMETSHE22MO




Long Island - LON
DOLMETLON22MO




Cloudysky - CLO
DOLMETCLO22MO



Greensky - GRE
DOLMETGRE22MO



Nightsky - NIG
DOLMETNIG22MO



Acadia - ACA
DOLMETACA22MO

Metro 2.0

Glazed Porcelain

Photo Features 12"x24" Rectified Field Tile - Matte in Greensky.

SIZING & PACKAGING

Type	Shape	Item Code	Size	Description	Pcs / Ctn	Sf / Ctn
Field		DOLMET***1224	12"x24"	Rectified Field Tile - Matte	8	15.75
		DOLMETLON1224	12"x24"	Rectified Field Tile - Matte in Long Island	8	15.50
		DOLMET***2424	24"x24"	Rectified Field Tile - Matte	4	15.83
		DOLMET***2424	24"x24"	Rectified Field Tile - Matte in Long Island/ Cloudysky	4	15.50
		DOLMET***324BN	3"x24"	Surface Bullnose - Matte	10	-
Mosaic		DOLMET***22MO	12"x12" Sheet	2"x2" Mosaic - Matte	5	-

♦ Long Island color only - requires minimum quantities of 1,000 pieces for Cove Base and 25 pieces for Cove Base corners.

ANSI TECHNICAL SPECIFICATIONS

	DCOF Acutest	PEI Rating ASTM# C1027	Frost Resistant ASTM# C1026	Scratch Resistance MOHS	Breaking Strength ASTM# C648	Water Absorption ASTM# C373	Chemical Resistance ASTM# C650
Results	≥ 0.42	4	Unaffected	7	≥ 350 lbf	≤ 0.5%	Unaffected


Shade Variation



V2-Slight


APPLICATIONS

	Floors	Walls	Countertops	Shower Floors	Shower Walls	Pools/Spas
Residential	● †	◻	◻	● †	◻	◻
Commercial	● †	◻	◻	● †	◻	◻



LEGEND

- ◻ Product rated for Interior & Exterior use
- Product rated for Interior use only
- † May be suitable for Exterior Floors
- ∅ Applications & ANSI Technical Specifications do not apply
- * Special Order only



† The TCNA does not rate products for exterior floors. Project specifier must determine product suitability for exterior floor applications by evaluating specific project conditions, type of use, traffic, drainage, expected contaminants (such as water, oil, grease, etc.), wear, maintenance, and manufacturer's specifications and guidelines. Use caution--product may not be suitable for pool decks. Not suitable for ramps. No polished tiles; only textured surfaces may be suitable.

For installation of all Matte porcelain tile, use a grout release prior to grouting to prevent absorption of the grout into the micropores of the tile. A grout color that matches the predominant color of the tile is recommended.

Merchandising materials and samples are for general reference only and representative of a product's potential characteristics. Tile is subject to variation in color/shade, size, texture, and finish. Field, mosaic and trim tile may not match exactly. Blend tiles from different boxes to achieve consistent shade distribution. Installer and end user must conduct a dry mock layout under proper lighting conditions to inspect the product. Installation constitutes product acceptance. Improper installation, application, use, care and maintenance voids warranty. Reference the TCNA Handbook and ANSI for installation guidance. Please visit bedrosians.com for current product information. We reserve the right to make product changes at any time without notice.

