



**Bianco - BI**  
PIEPURBI1224  
12"x24" Non-Rectified Field Tile - Natural



**Bianco - BI**  
PIEPURBI1224V  
12"x24" Non-Rectified Field Tile - Velvet



**Bianco - BI**  
PIEPURBI1224M  
12"x24" Non-Rectified Field Tile - Muretto



**Bianco**  
100000244  
1"x4" Mosaic - Natural  
(12"x12" Sheet)



**Beige - BE**  
PIEPURBE1224  
12"x24" Non-Rectified Field Tile - Natural



**Beige - BE**  
PIEPURBE1224V  
12"x24" Non-Rectified Field Tile - Velvet



**Beige - BE**  
PIEPURBE1224M  
12"x24" Non-Rectified Field Tile - Muretto



**Beige**  
100000243  
1"x4" Mosaic - Natural  
(12"x12" Sheet)



**Grigio - GR**  
PIEPURGR1224  
12"x24" Non-Rectified Field Tile - Natural



**Grigio - GR**  
PIEPURGR1224V  
12"x24" Non-Rectified Field Tile - Velvet




**Grigio - GR**  
PIEPURGR1224M  
12"x24" Non-Rectified Field Tile - Muretto



**Grigio**  
100000245  
1"x4" Mosaic - Natural  
(12"x12" Sheet)



Photo Features 12"x24" Non-Rectified Field Tile - Natural in Beige.

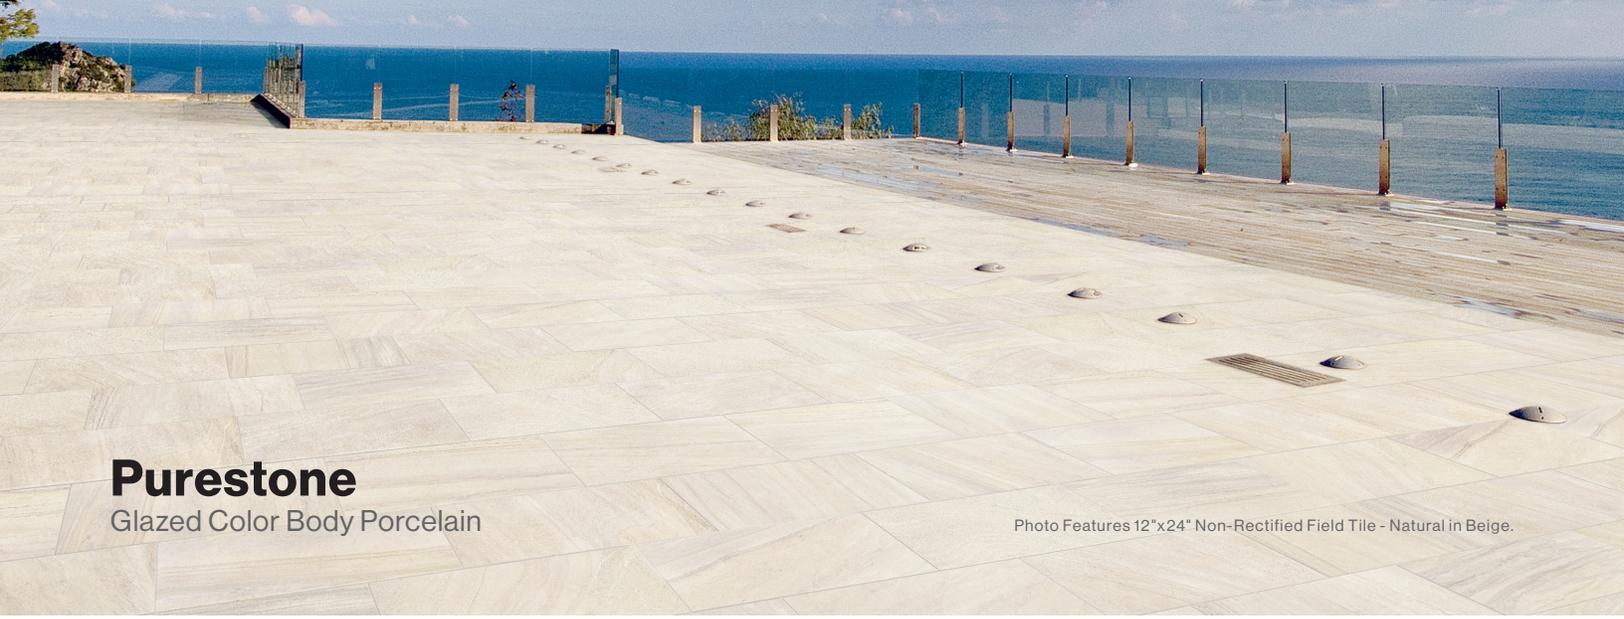

# Purestone

## Glazed Color Body Porcelain

Photo Features 12"x24" Non-Rectified Field Tile - Natural in Beige.


### SIZING & PACKAGING

Type	Shape	Item Code	Size	Description	Pcs / Ctn	Sf / Ctn
Field		PIEPUR•1224	12"x24"	Non-Rectified Field Tile - Natural in Beige/Grigio	6	11.73
		PIEPURBI1224	12"x24"	Non-Rectified Field Tile - Natural in Bianco	7	13.70
		PIEPURBE1224M	12"x24"	Non-Rectified Field Tile - Muretto Textured in Beige	6	11.63
		PIEPUR•1224M	12"x24"	Non-Rectified Field Tile - Muretto Textured in Bianco/Grigio	7	13.56
		PIEPUR•1224V	12"x24"	Non-Rectified Field Tile - Velvet	6	11.63
Trim		PIEPUR•S324	3"x24"	Bullnose - Natural	10	5.17
Mosaic		Ø 100000244	12"x12" Sheet	1"x4" Mosaic - Natural in Bianco	5	-
		Ø 100000243	12"x12" Sheet	1"x4" Mosaic - Natural in Beige	5	-
		Ø 100000245	12"x12" Sheet	1"x4" Mosaic - Natural in Grigio	5	-

### ANSI TECHNICAL SPECIFICATIONS


	DCOF Acutest	PEI Rating ASTM# C1027	Frost Resistant ASTM# C1026	Scratch Resistance MOHS	Breaking Strength ASTM# C648	Water Absorption ASTM# C373	Chemical Resistance ASTM# C650
Results	≥ 0.42	Pass ≤ 175 (ISO)	Unaffected	N/A	Pass (10,000 ISO)	≤ 0.5%	Unaffected

### Shade Variation




### APPLICATIONS

	Floors	Walls	Countertops	Shower Floors	Shower Walls	Pools/Spas
Residential	● †	☐	☐	● †	☐	☐
Commercial	● †	☐	☐	● †	☐	☐



### LEGEND

- ☐ Product rated for Interior & Exterior use
- Product rated for Interior use only
- † May be suitable for Exterior Floors
- Ø Applications & ANSI Technical Specifications do not apply
- \* Special Order only



Use of a leveling system during installation is strongly recommended

† The TCNA does not rate products for exterior floors. Project specifier must determine product suitability for exterior floor applications by evaluating specific project conditions, type of use, traffic, drainage, expected contaminants (such as water, oil, grease, etc.), wear, maintenance, and manufacturer's specifications and guidelines. Use caution--product may not be suitable for pool decks. Not suitable for ramps. No polished tiles; only textured surfaces may be suitable.

Merchandising materials and samples are for general reference only and representative of a product's potential characteristics. Tile is subject to variation in color/shade, size, texture, and finish. Field, mosaic and trim tile may not match exactly. Blend tiles from different boxes to achieve consistent shade distribution. Installer and end user must conduct a dry mock layout under proper lighting conditions to inspect the product. Installation constitutes product acceptance. Improper installation, application, use, care and maintenance voids warranty. Reference the TCNA Handbook and ANSI for installation guidance. Please visit bedrosians.com for current product information. We reserve the right to make product changes at any time without notice.

