

Field Tile Sizes



Crème - CR
STPSIMCR1212 - 12"x12" Non-Rectified - Honed
STPSIMCR1224 - 12"x24" Non-Rectified - Honed



Tan - TA
STPSIMTA1212 - 12"x12" Non-Rectified - Honed
STPSIMTA1224 - 12"x24" Non-Rectified - Honed



Grey - GR
STPSIMGR1212 - 12"x12" Honed
STPSIMGR1224 - 12"x24" Honed



Coffee - CO
STPSIMCO1212 - 2"x12" Non-Rectified - Honed
STPSIMCO1224 - 12"x24" Non-Rectified - Honed



Black - BL
STPSIMBL1212 - 2"x12" Non-Rectified - Honed
STPSIMBL1224 - 12"x24" Non-Rectified - Honed

2"x2" Mosaic - Honed (12"x12" Sheet)



Crème - CR
STPSIMCR22MO




Tan - TA
STPSIMTA22MO




Grey - GR
STPSIMGR22MO



Coffee - CO
STPSIMCO22MO



Black - BL
STPSIMBL22MO

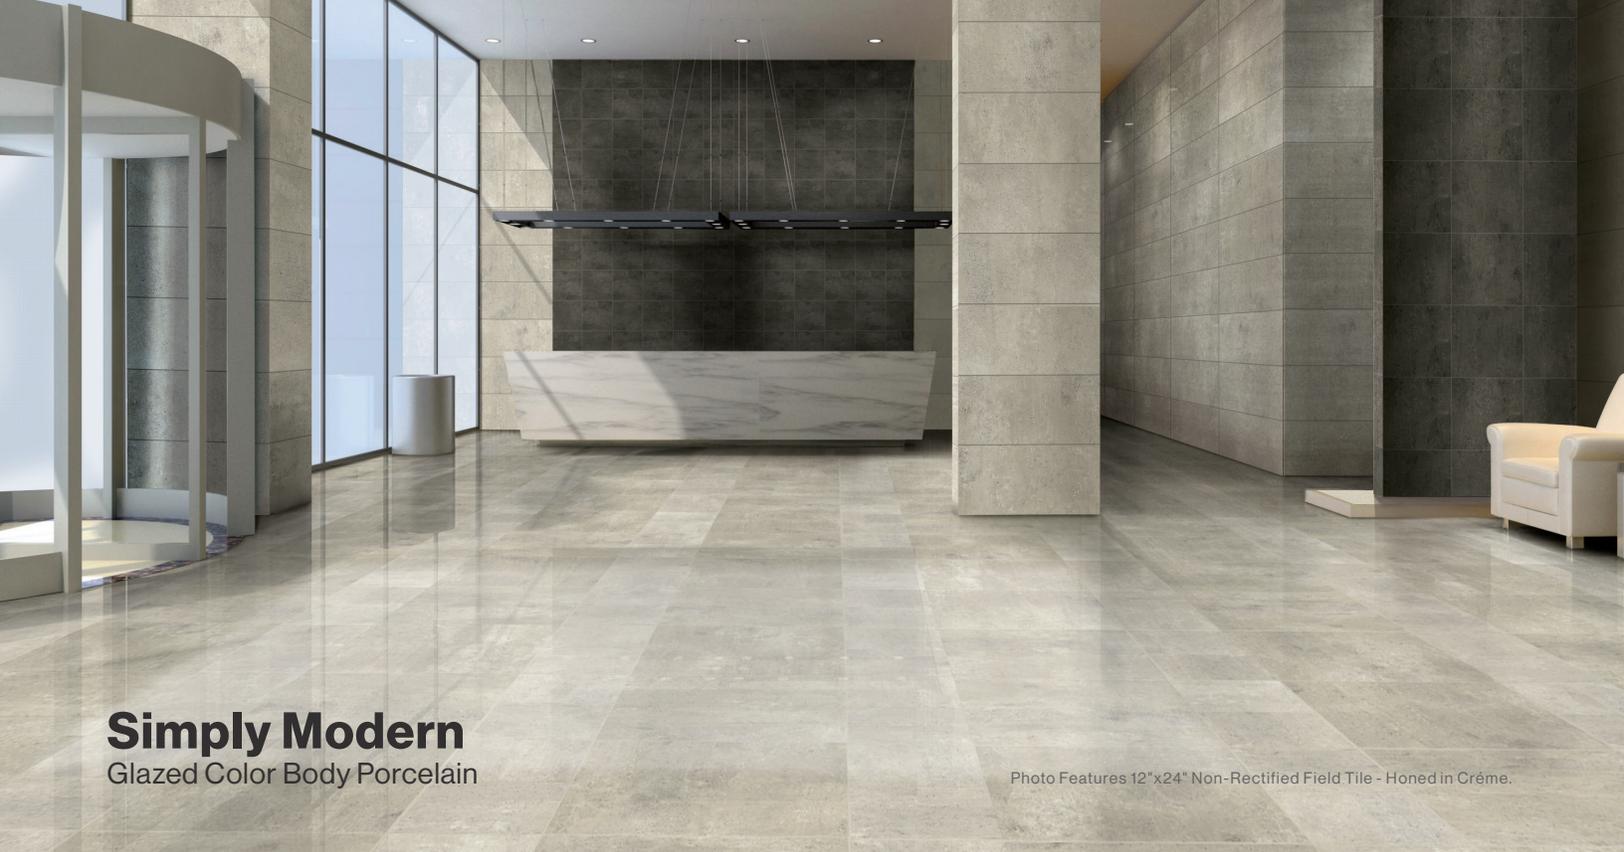

Simply Modern

Glazed Color Body Porcelain

Photo Features 12"x24" Non-Rectified Field Tile - Honed in Crème.


SIZING & PACKAGING

Type	Shape	Item Code	Size	Description	Pcs / Ctn	Sf / Ctn
Field		STPSIM**1224	12"x24"	Non-Rectified Field Tile - Honed	8	15.75
Trim		STPSIM**312BN	3"x12"	Bullnose - Honed	15	-
Mosaic		∅ STPSIM**22MO	12"x12" Sheet	2"x2" Mosaic - Honed	-	-

ANSI TECHNICAL SPECIFICATIONS

	DCOF Acutest	PEI Rating ASTM# C1027	Frost Resistant ASTM# C1026	Scratch Resistance MOHS	Breaking Strength ASTM# C648	Water Absorption ASTM# C373	Chemical Resistance ASTM# C650
Results	≥ 0.42	4	Unaffected	7	≥ 350 lbf	≤ 0.5%	Unaffected


Shade Variation



V2-Slight

APPLICATIONS

	Floors	Walls	Countertops	Shower Floors	Shower Walls	Pools/Spas
Residential	●	●	●	●	●	●
Commercial	●	●	●	●	●	●




LEGEND

- Product rated for Interior & Exterior use
- Product rated for Interior use only
- † May be suitable for Exterior Floors
- ∅ Applications & ANSI Technical Specifications do not apply
- * Special Order only



PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS: UL COMGG UL 2818



Use of a leveling system during installation is strongly recommended

Merchandising materials and samples are for general reference only and representative of a product's potential characteristics. Tile is subject to variation in color/shade, size, texture, and finish. Field, mosaic and trim tile may not match exactly. Blend tiles from different boxes to achieve consistent shade distribution. Installer and end user must conduct a dry mock layout under proper lighting conditions to inspect the product. Installation constitutes product acceptance. Improper installation, application, use, care and maintenance voids warranty. Reference the TCNA Handbook and ANSI for installation guidance. Please visit bedrosians.com for current product information. We reserve the right to make product changes at any time without notice.

