




Snow
100010186 - 16"x48" Rectified Wall Tile - Matte



Sand
100010187 - 16"x48" Rectified Wall Tile - Matte

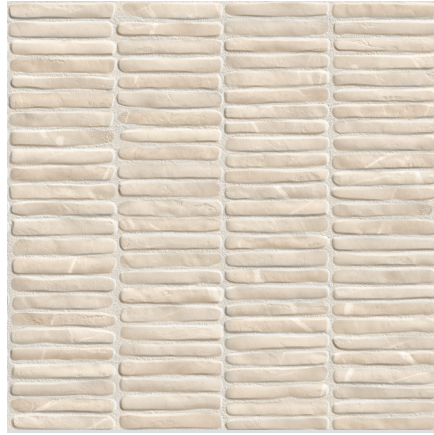

Greige
100010188 - 16"x48" Rectified Wall Tile - Matte





Node

Glazed White Body Ceramic

Photo Features 16"x48" Rectified Wall Tile - Matte in Snow.


SIZING & PACKAGING

Type	Shape	Snow Item Code	Sand Item Code	Greige Item Code	Size	Description	Pcs / Ctn	Sf / Ctn	Sf/Plt
Field		100010186	100010187	100010188	16"x48"	Rectified Wall Tile - Matte	3	15.50	310.00

ANSI TECHNICAL SPECIFICATIONS


	DCOF Acutest	PEI Rating ASTM# C1027	Frost Resistant ASTM# C1026	Scratch Resistance MOHS	Breaking Strength ASTM# C648	Water Absorption ASTM# C373	Chemical Resistance ASTM# C650
Results	N/A	N/A	Affected	N/A	ISO ≥ 600 N	> 1.0(Ceramic)	Unaffected

Shade Variation



APPLICATIONS

	Floors	Walls	Countertops	Shower Floors	Shower Walls	Pools/Spas
Residential		●			●	
Commercial		●			●	



LEGEND

- Product rated for Interior & Exterior use
- Applications & ANSI Technical Specifications do not apply
- Product rated for Interior use only
- * Special Order only
- † May be suitable for Exterior Floors



IMPORTANT: Installation Instructions - We recommend wet cutting or the score and snap method during the installation process. Improper installation techniques could expose installer to inhalation of harmful silica dust. Do not dry cut product using power tools during the installation process. Using dry cutting methods could present a risk of acute lung injury. If adequate ventilation cannot be achieved, wear a mask or respirator. For more information, see the SDS at www.bedrosians.com/en/installation-care-maintenance/.

Merchandising materials and samples are for general reference only and representative of a product's potential characteristics. Tile is subject to variation in color/shade, size, texture, and finish. Field, mosaic and trim tile may not match exactly. Blend tiles from different boxes to achieve consistent shade distribution. Installer and end user must conduct a dry mock layout under proper lighting conditions to inspect the product. Installation constitutes product acceptance. Improper installation, application, use, care and maintenance voids warranty. Reference the TCNA Handbook and ANSI for installation guidance. Please visit bedrosians.com for current product information. We reserve the right to make product changes at any time without notice.

